



MVE STANDARD RANGE




DC DIRECT CURRENT - 3000 rpm - 50Hz



Wm (kgcm)	Model	RPM	Centrifugal Force (kg)	Weight (kg)	ELECTRICAL SPECIFICATIONS			CERTIFICATE
					Input Power (kW)	Nominal Current A max	Cable	II3D
4.17	MVE 202 DC 24	3000	200	7.2	0.16	6.7	M20	100°C
4.17	MVE 202 DC 12	3000	200	7.2	0.16	13.3	M20	100°C
1.02	MVE 50 DC 24	3000	50	4.4	0.08	3.3	M16	100°C
1.02	MVE 50 DC 12	3000	50	4.4	0.08	6.6	M16	100°C

To convert kg into Newton: $N = 9.81 \cdot kg$

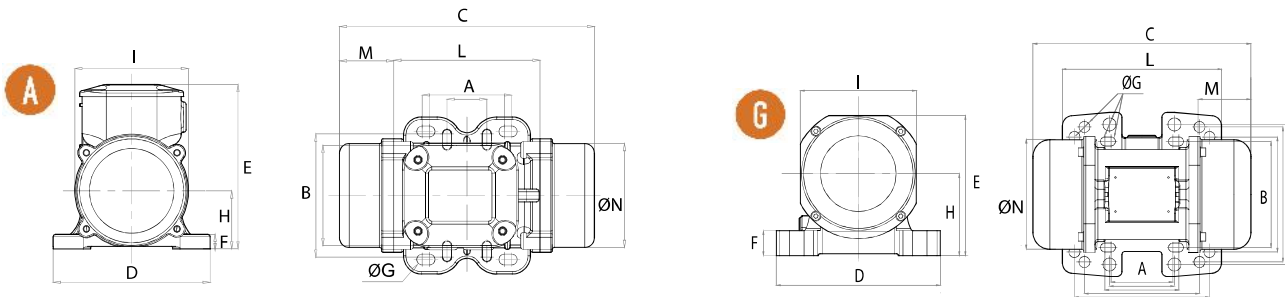

DIMENSIONAL SPECIFICATIONS (mm)															
Model	Drawing	Size	C	M	A	B	ØG	Holes	D	E	F	H	I	L	N
MVE 202 DC 24	G	23	218	53	Multiple Footprint			4	164	140	25	82	116	159	110
					62-74	106	9								
					65	140	13								
MVE 202 DC 12	G	23	218	53	115	135	11	4	164	140	25	82	116	159	110
					135	115	11								
					Multiple Footprint										
MVE 50 DC 24	A	10	211	45	Multiple Footprint			4	130	136	12	48	94	121	85
					62-74	106	9								
					33	83-102	7								
MVE 50 DC 12	A	10	211	45	33	83-102	7	4	130	136	12	48	94	121	85

NOTE: Dimensions with coarse degree of accuracy related to UNI 22768/1

This information is furnished without warranty, representation, inducement or license of any kind. It is accurate to the best OLI knowledge or is obtained from sources believed to be accurate. OLI therefore assumes no legal responsibility.